



Ultimate solution for increased oil removal capacity

Eaton's ABSORPTION INSERT filter elements are suitable for oil and gel removal in metal cleaning, paint, coating and e-coating applications and many more.

ABSORPTION INSERT filter elements combined with standard filter bags and a stainless steel charging ring provide the ultimate solution for increased dirt and oil removal capacity. The ABSORPTION INSERT filter element fits in ACCUGAF™, DURAGAF™, LOFCLEAR™ 100 (except LCR-130), Monofilament, Multifilament, SENTINEL®, SNAP-RING® and UNIBAG® filter bags.

Features and benefits

- The ABSORPTION INSERT filter element is a hollow pillow placed inside a standard filter bag (size 02)
- 850 g highly efficient melt-blown polypropylene 'spaghetti' fibers virtually traps two times its own weight
- Perforated spunbond cover layer keep all polypropylene 'spaghetti' fibers perfectly together
- Extruded polypropylene core stabilizes the filter element and allows a homogeneous and constant liquid flow from the inside to the outside
- Stainless steel charging ring directs the liquid flow directly into the center core preventing the filter element from collapsing
- Material is free from silicone and crater-forming substances¹

Filter specifications

Material
Melt-blown polypropylene

Cover layer
Spunbond polypropylene

Inner core
Extruded polypropylene

Dimensions/Parameters

Size
02: Ø 180 x 810 mm L

Max. operating temperature
Polypropylene: 90 °C

Max. differential pressure
0.5 bar

Max. flow rate²
02: 10 m³/h

For more information:


WEB: FLTR.com.au PHONE: (+61) 1300 62 4020 EMAIL: info@FLTR.com.au SKYPE: Purple.Engineering

ABSORPTION INSERT Filter Element Range



'Spaghetti' fiber matrix

Ordering information

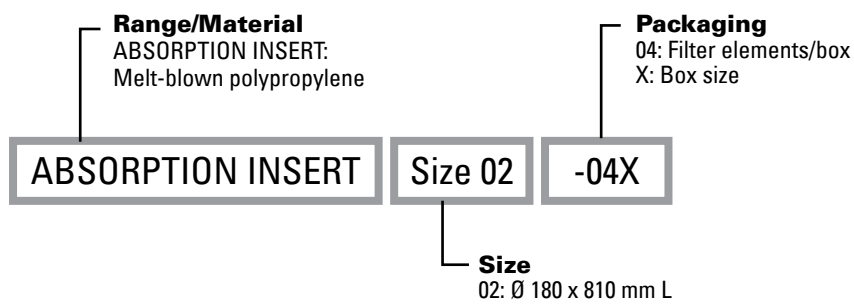

¹ Based on an accepted paint compatibility test (see document QUC-STA-10).

² For liquids with a dynamic viscosity of 1 mPa·s @ 20 °C

For more information:

WEB: FLTR.com.au PHONE: (+61) 1300 62 4020 EMAIL: info@FLTR.com.au SKYPE: Purple.Engineering