
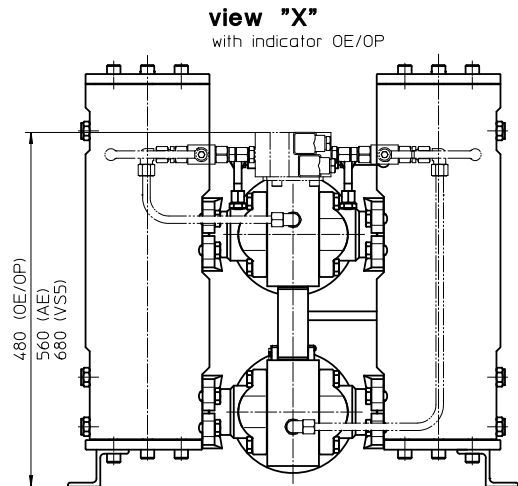
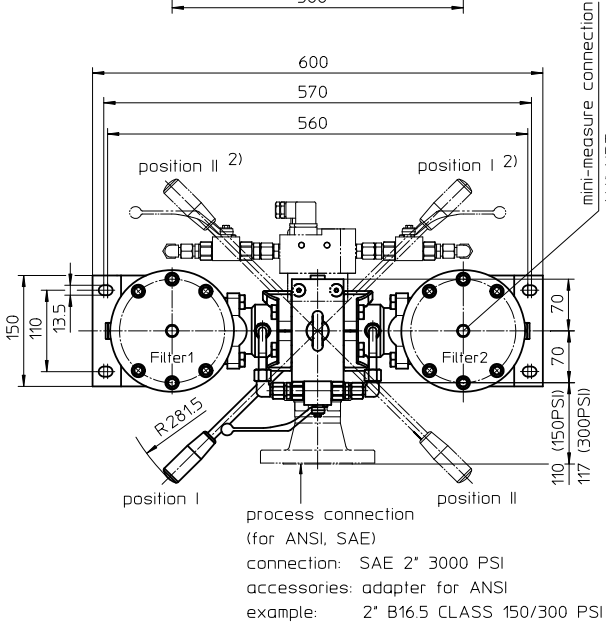
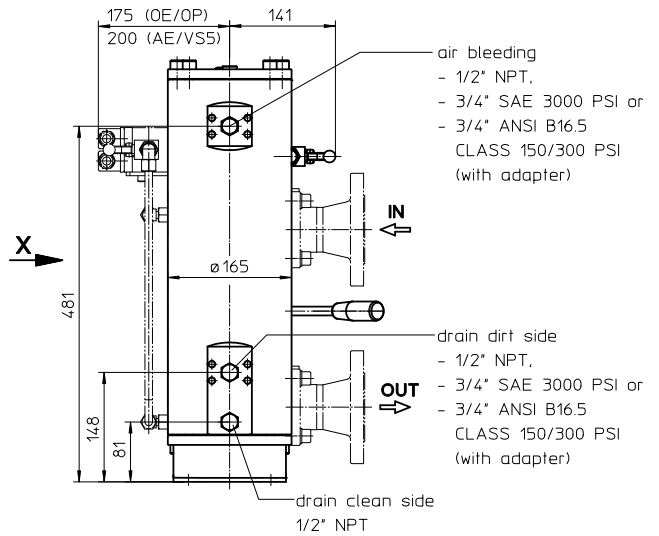


Series DA 403

NPS 2" CLASS 150-300 PSI

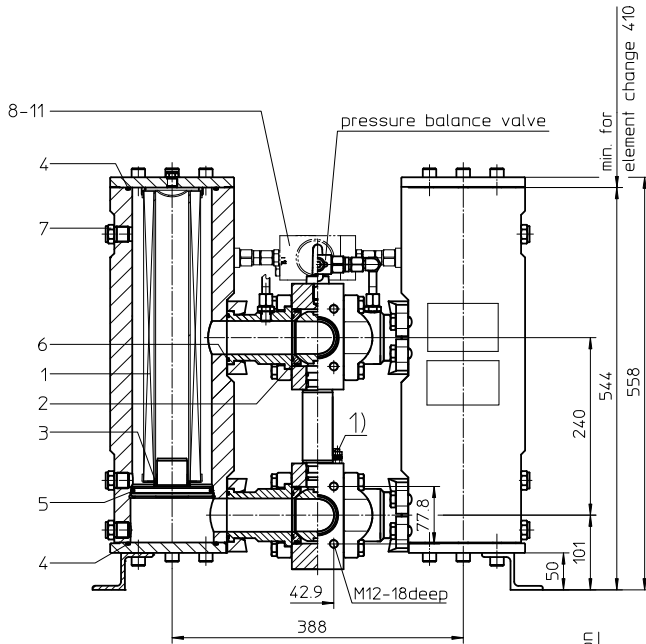

Position I: Filter 1 in operation
 Position II: Filter 2 in operation

1) Connection for the potential equalization, only for application in the explosive area.

Switch lever standard in the front.

2) On request
 The switch lever can be moved to backside of the changeover valve, opposite to the inlet and outlet.
 Please specify this configuration on the order.

Weight: approx. 152 kg

EDV 02/19

Dimensions: mm

Designs and performance values are subject to change.

For more information:

WEB: FLTR.com.au PHONE: (+61) 1300 62 4020 EMAIL: info@FLTR.com.au SKYPE: Purple.Engineering



Pressure Filter, changeover

Series DA 403

NPS 2" CLASS 150-300 PSI

Description:

Pressure filter series DA 403 have a working pressure up to 40 bar. Pressure peaks can be absorbed with a sufficient safety margin.

A changeover ball valve between the two filter housings makes it possible to switch from the dirty filter side to the clean filter side without interrupting operation.

The filter element consists of star-shaped, pleated filter material which is supported on the inside by a perforated core tube and is bonded to the end caps with a high-quality adhesive. The flow direction is from outside to inside.

For cleaning the stainless steel mesh element (see special leaflets 21070-4 and 39448-4) or changing the filter element, remove the cover and take out the element. The mesh elements are not guaranteed to maintain 100% performance after cleaning.

For filtration finer than 40 µm use disposable elements made of microglass. Filter elements as fine as 5 µm(c) are available; finer filter elements are available upon request.

Eaton filter elements are known for a high intrinsic stability and an excellent filtration capability, a high dirt-retaining capacity and a long service life.

Eaton filter elements are suitable for all petroleum based fluids, HW-emulsions, most synthetic hydraulic fluids and lubrication oils.

Ship classifications available upon request.

Type index:

Complete filter: (ordering example)

DA. 403. 10VG. 30. E. P. -. FA1. 8. -. IS21.

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |
|---|---|---|---|---|---|---|---|---|----|----|

KH. OE

| | |
|----|----|
| 12 | 13 |
|----|----|

- | | |
|----|--|
| 1 | series: DA = pressure filter changeover, according to ASME-code |
| 2 | nominal size: 403 |
| 3 | filter material: 80G, 40G, 25G, 10G stainless steel wire mesh 25VG, 16VG, 10VG, 6VG, 3VG microglass 25API, 10API microglass according to API |
| 4 | filter element collapse rating: 30 = Δp 30 bar |
| 5 | filter element design: E = single-end open S = with by-pass valve Δp 2,0 bar S1 = with by-pass valve Δp 3,5 bar |
| 6 | sealing material: P = Nitrile (NBR) V = Viton (FPM) |
| 7 | filter element specification: - = standard VA = stainless steel |
| 8 | process connection: FS = flange SAE 3000 PSI FA1 = flange ANSI CLASS 300 PSI, sealing surface Rz = 160 µm (not finer than 40 µm) FA2 = flange ANSI CLASS 300 PSI, sealing surface Rz = 16 µm FA11 = flange ANSI CLASS 150 PSI, sealing surface Rz = 160 µm (not finer than 40 µm) FA12 = flange ANSI CLASS 150 PSI, sealing surface Rz = 16 µm |
| 9 | process connection size: 8 = 2" |
| 10 | filter housing specification: - = standard IS12 = internal parts of changeover armature stainless steel, see sheet-no. 41028 |
| 11 | specification pressure vessel: IS21 = ASME VIII Div.1 with U-stamp, see sheet-no. 43415 IS23 = ASME VIII Div.1 without U-stamp, see sheet-no. 55218 |
| 12 | shut-off : - = without KH = with shut-off ball valve |
| 13 | clogging indicator or clogging sensor: - = without AE = visual-electric, see sheet-no. 1609 OP = visual, see sheet-no. 1614 OE = visual-electric, see sheet-no. 1614 VS5 = electronic, see sheet-no. 1641 |

To add an indicator/sensor to your filter, use the corresponding indicator data sheet to find the indicator details and add them to the filter assembly model code.

Filter element: (ordering example)

01NL. 400. 10VG. 30. E. P. -

| | | | | | | |
|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
|---|---|---|---|---|---|---|

- | | |
|---|---|
| 1 | series: 01NL = standard filter element according to DIN 24550, T3 |
| 2 | nominal size: 400 |
| 3 | - 7 see type index-complete filter |

Accessories:

- SAE-counter flanges, see sheet-no. 1652
- drain- and bleeder connection, see sheet-no. 1659
- adapter for ANSI-connection B16.5 CLASS 150/300 PSI, see sheet-no. 1658

Technical data:

| | |
|--|--|
| operating temperature: | -10°C to +100°C |
| operating medium: | mineral oil, other media on request |
| max. operating pressure (pressure vessel): | 40 bar |
| test pressure acc. to ASME VIII Div. 1: | 1,3 x operating pressure = 52 bar |
| test pressure acc. to API 614, Chapter 1: | 1,5 x operating pressure = 60 bar |
| connection system: | SAE-flange 3000 PSI or ANSI-flange B16.5 CLASS 150/300 PSI |
| housing material: | carbon steel (ASTM), see sheet-no. 67617 |
| sealing material: | Nitrile (NBR) or Viton (FPM), other materials on request |
| installation position: | vertical |
| bleeder connection: | NPT ½" or SAE ¾" 3000 PSI |
| drain connection dirt side: | NPT ½" or SAE ¾" 3000 PSI |
| drain connection clean side: | NPT ½" |
| volume tank: | 2x 4,3 l |
| operating pressure adapter flanges: | according to B16.5 CLASS 150 PSI (max. 16 bar) according to B16.5 CLASS 300 PSI (max. 40 bar) |

Classified under the Pressure Equipment Directive 2014/68/EU for mineral oil (fluid group 2), Article 4, Para. 3. Classified under ATEX Directive 2014/34/EU according to specific application (see questionnaire sheet-no. 34279-4)

Pressure drop flow curves:

Filter calculation/sizing

The pressure drop of the assembly at a given flow rate Q is the sum of the housing Δp and the element Δp and is calculated as follows:

$$\Delta p_{assembly} = \Delta p_{housing} + \Delta p_{element}$$

$$\Delta p_{housing} = (\text{see } \Delta p = f(Q) \text{ - characteristics})$$

$$\Delta p_{Element} (mbar) = Q \left(\frac{l}{min} \right) \times \frac{MSK (mbar)}{10} \left(\frac{l}{min} \right) \times v \left(\frac{mm^2}{s} \right) \times \frac{\rho (kg)}{0,876 (dm^3)}$$

For ease of calculation our Filter Selection tool is available online at www.eatonpowersource.com/calculators/filtration/


Material gradient coefficients (MSK) for filter elements

The material gradient coefficients in mbar/(l/min) apply to mineral oil (HLP) with a density of 0,876 kg/dm³ and a kinematic viscosity of 30 mm²/s (139 SUS). The pressure drop changes proportionally to the change in kinematic viscosity and density.

| DA | VG | | | | | G | | | | API | |
|-----|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|
| | 3VG | 6VG | 10VG | 16VG | 25VG | 10G | 25G | 40G | 80G | 10 API | 25 API |
| 403 | 0,571 | 0,397 | 0,254 | 0,221 | 0,151 | 0,0228 | 0,0169 | 0,0158 | 0,0108 | 0,130 | 0,059 |

$\Delta p=f(Q)$ – characteristic according ISO 3968


The pressure drop characteristics apply to mineral oil (HLP) with a density of 0,876 kg/dm³. The pressure drop changes proportionally to the density.

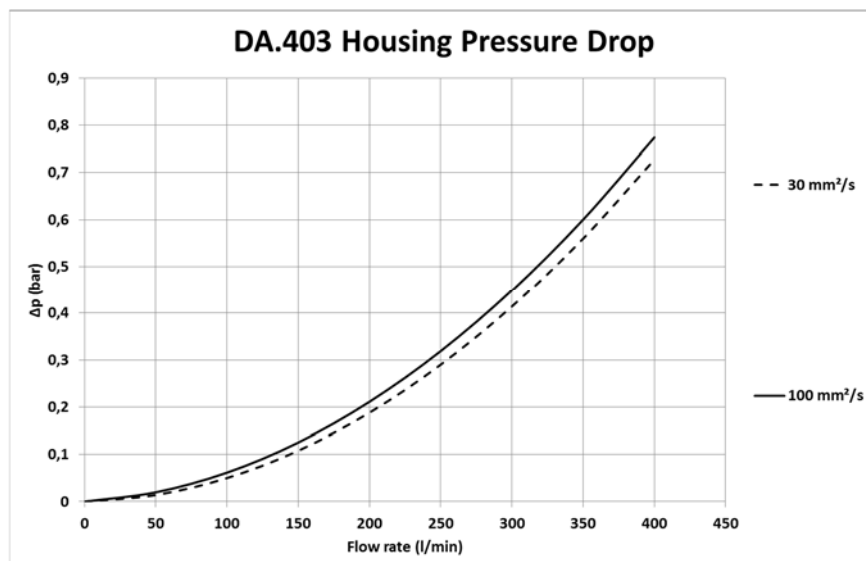

For more information:

WEB: FLTR.com.au PHONE: (+61) 1300 62 4020 EMAIL: info@FLTR.com.au SKYPE: Purple.Engineering

Symbols:

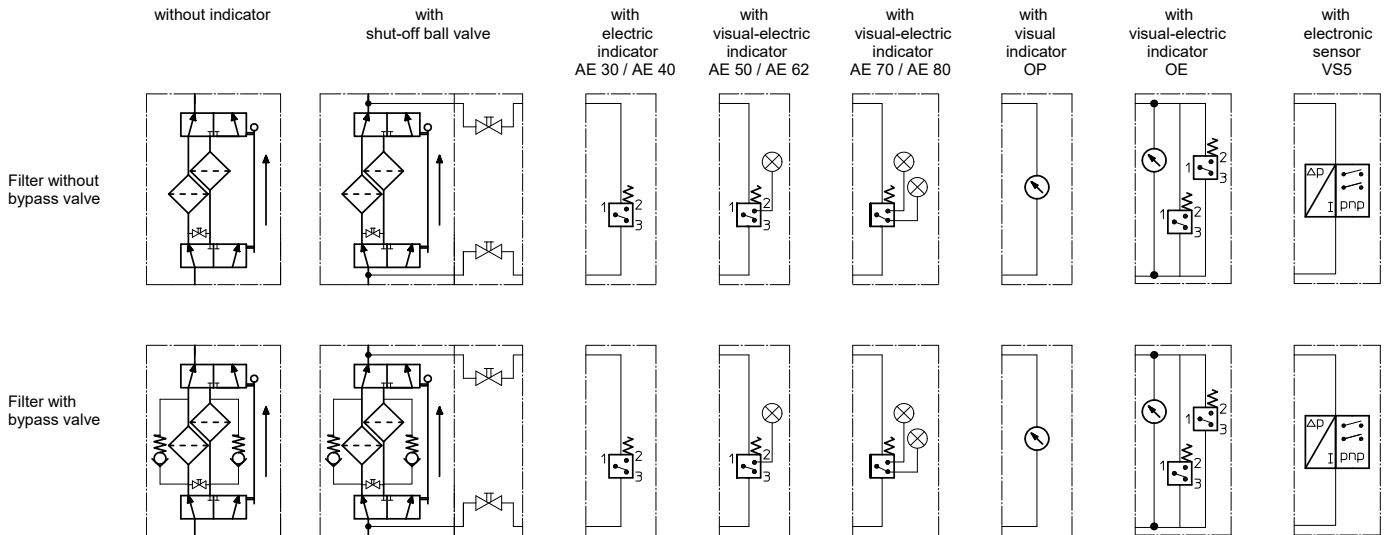

Spare parts:

| item | qty. | designation | dimension | article-no. | |
|------|------|-------------------------------------|--------------|--------------------|--------------|
| 1 | 2 | filter element | 01NL.400... | | |
| 2 | 4 | gasket kit of changeover | DN50 (2") | 350656 (NBR) | 350657 (FPM) |
| 3 | 2 | O-ring | 40 x 3 | 304389 (NBR) | 304391 (FPM) |
| 4 | 4 | O-ring | 115 x 3,55 | 350198 (NBR) | 350197 (FPM) |
| 5 | 2 | O-ring | 100 x 5 | 327063 (NBR) | 327064 (FPM) |
| 6 | 4 | O-ring | 56,75 x 3,53 | 306035 (NBR) | 310264 (FPM) |
| 7 | 6 | screw plug | NPT 1/2" | 307766 | |
| 8 | 1 | clogging indicator, visual-electric | OE | see sheet-no. 1614 | |
| 9 | 1 | clogging indicator, visual | OP | see sheet-no. 1614 | |
| 10 | 1 | clogging indicator, visual-electric | AE | see sheet-no. 1609 | |
| 11 | 1 | clogging sensor, electronic | VS5 | see sheet-no. 1641 | |

Test methods:

Filter elements are tested according to the following ISO standards:

| | |
|-----------|---|
| ISO 2941 | Verification of collapse/burst resistance |
| ISO 2942 | Verification of fabrication integrity |
| ISO 2943 | Verification of material compatibility with fluids |
| ISO 3723 | Method for end load test |
| ISO 3724 | Verification of flow fatigue characteristics |
| ISO 3968 | Evaluation of pressure drop versus flow characteristics |
| ISO 16889 | Multi-pass method for evaluating filtration performance |

For more information:

WEB: FLTR.com.au PHONE: (+61) 1300 62 4020 EMAIL: info@FLTR.com.au SKYPE: Purple.Engineering