

Lightweight, economical single bag filter housing for commercial applications

Eaton's ECOLINE single bag filter housing is a lightweight design for commercial, OEM, non-hazardous, low-pressure applications that do not require a code stamp. This single bag filter housing is a highly cost-effective solution for price-sensitive applications and features a handy V-clamp closure and threaded couplings. Units come standard with filter bag size 01, 02, 03 or 04 stainless steel restrainer baskets.

Features

- Side inlet with evacuation cover prevents spillage of unfiltered liquid, allowing for clean and easy filter bag change-outs
- V-clamp cover closure is easy to operate, allowing cover to be removed or closed quickly
- Compression hold down creates 360 degree sealing between the filter bag and the bag filter housing
- Designed with a 1/4" thread port on the lid for vent or gauge
- Smooth, bead-blasted finish makes it easy to completely clean the interior

Options

- Available in 304 and 316 Ti stainless steel for high corrosion resistance
- Adjustable mounting legs for simplified installation
- Multiple I/O connections to suit application




Unique, internal body-to-basket O-ring seal prevents bypass and is easy to maintain



ECOLINE Single Bag Filter Housing

Applications

, applicationic	
Coarse filtration > 500 μ m	1
Medium filtration > 10 μ m	
Fine filtration < 10 μ m	
Pre-filtration	1
Safety filtration	
High volume	
Batch filtration	
Circuit filtration	
Continuous filtration	
Solvents, paints	
Fats and oils	
Catalyst, activated carbon	
Acids, bases	
Petrochemicals	
Water, waste water	1
Chemical industry	
Pharmaceuticals	
Metal cleaning	
Automotive	
Electronics	
Food and beverage	
Paint and lacquer	
Water treatment	1
Galvanic industry	

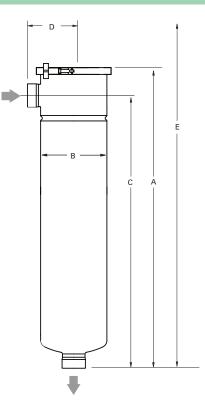

Dimensions - mm

Models	А	В	C	D	E
EBF-0101	559	195	489	150	940
EBF-0102	954	195	884	150	1727
EBF-0103	355	114	299	110	609
EBF-0104	514	114	454	110	876

Dimensions for reference only and approximate. Exact dimensions for installation purposes available on request.

Technical data

Models	No. of filter bags	Size	Flow rate ¹ m ³ /h	Max. pressure bar	Max. temp. °C	Housing volume I	Housing weight kg	l/O connections
EBF-0101	1	1	20	6	120	15.5	7.5	2" BSP female thread
EBF-0102	1	2	40	6	120	27	11	2" BSP female thread
EBF-0103	1	3	6	9	120	3	3.5	1 ¹ /2" BSP female thread
EBF-0104	1	4	12	9	120	4.5	4.5	1 ¹ /2" BSP female thread

¹ Maximum theoretical flow based on water viscosity, filter bag specific.

