
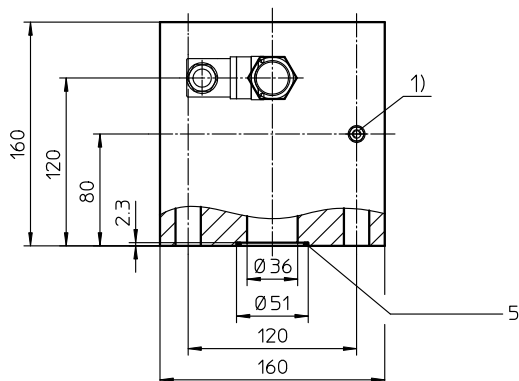


# PRESSURE FILTER, manifold mounted

Series HPF 601-1351 DN 36 PN 315

Sheet No.  
1472 L

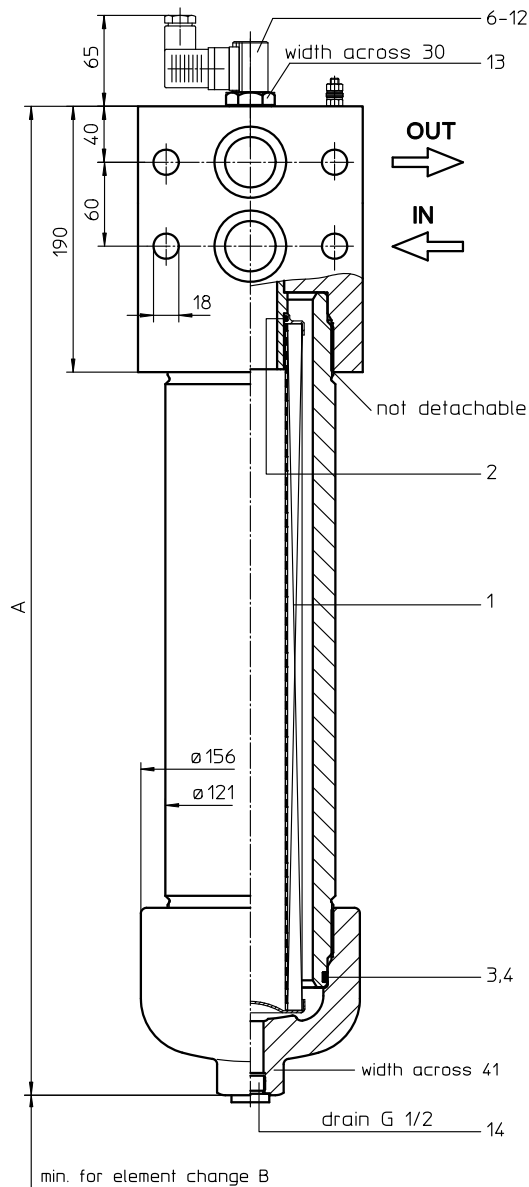

1) connection for the potential equalisation, only for application in the explosive area

## 1. Type index:

### 1.1. Complete filter: (ordering example)

**HPF. 901. 10VG. HR. E. P. - . F. 6. - . - . AE**

|   |   |   |   |   |   |   |   |   |    |    |    |
|---|---|---|---|---|---|---|---|---|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|---|---|---|---|---|---|---|---|---|----|----|----|

- 1 **series:**  
HPF = pressure filter, manifold mounted
- 2 **nominal size:** 601, 901, 1351
- 3 **filter-material and filter-fineness:**  
80 G = 80  $\mu\text{m}$ , 40 G = 40  $\mu\text{m}$ , 25 G = 25  $\mu\text{m}$  stainless steel wire mesh  
25 VG = 20  $\mu\text{m}_{(c)}$ , 16 VG = 15  $\mu\text{m}_{(c)}$ , 10 VG = 10  $\mu\text{m}_{(c)}$ ,  
6 VG = 7  $\mu\text{m}_{(c)}$ , 3 VG = 5  $\mu\text{m}_{(c)}$  Interpor fleece (glass fibre)
- 4 **resistance of pressure difference for filter element:**  
30 =  $\Delta p$  30 bar  
HR =  $\Delta p$  160 bar (rupture strength  $\Delta p$  250 bar)
- 5 **filter element design:**  
E = single-end open
- 6 **sealing material:**  
P = Nitrile (NBR)  
V = Viton (FPM)
- 7 **filter element specification:** (see catalog)  
- = standard  
VA = stainless steel  
IS06 = see sheet-no. 31601
- 8 **connection:**  
F = manifold mounted
- 9 **connection size:**  
6 = DN 36
- 10 **filter housing specification:** (see catalog)  
- = standard  
IS06 = see sheet-no. 31605
- 11 **internal valve:**  
- = without  
S1 = with by-pass valve  $\Delta p$  3,5 bar  
S2 = with by-pass valve  $\Delta p$  7,0 bar  
R = reversing valve,  $Q \leq 465,348$  l/min
- 12 **clogging indicator or clogging sensor:**  
- = without  
AOR = visual, see sheet-no. 1606  
AOC = visual, see sheet-no. 1606  
AE = visual-electrical, see sheet-no. 1615  
VS1 = electronical, see sheet-no. 1617  
VS2 = electronical, see sheet-no. 1618

### 1.2. Filter element: (ordering example)

**01E. 900. 10VG. HR. E. P. -**

|   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
|---|---|---|---|---|---|---|

- 1 **series:**  
01E. = filter element according to company standard
- 2 **nominal size:** 600, 900, 1350
- 3 - 7 | see type index-complete filter

## 2. Dimensions:

| type        | HPF 601 | HPF 901 | HPF 1351 |
|-------------|---------|---------|----------|
| connection  | DN 36   | DN 36   | DN 36    |
| A           | 557     | 707     | 955      |
| B           | 310     | 460     | 710      |
| weight kg   | 47      | 54      | 66       |
| volume tank | 2,1 l   | 3,1 l   | 4,6 l    |

### 3. Spare parts:

| item | qty. | designation                           | dimension |               |          | article-no.         |              |
|------|------|---------------------------------------|-----------|---------------|----------|---------------------|--------------|
|      |      |                                       | HPF 601   | HPF 901       | HPF 1351 |                     |              |
| 1    | 1    | filter element                        | 01E.600   | 01E.900       | 01E.1350 |                     |              |
| 2    | 1    | O-ring                                |           | 48 x 3        |          | 304357 (NBR)        | 304404 (FPM) |
| 3    | 1    | O-ring                                |           | 98 x 4        |          | 301914 (NBR)        | 304765 (FPM) |
| 4    | 1    | support ring                          |           | 110 x 3,5 x 2 |          | 304802              |              |
| 5    | 1    | O-ring                                |           | 45 x 3        |          | 304991 (NBR)        | 304997 (FPM) |
| 6    | 1    | clogging indicator, visual            |           | AOR or AOC    |          | see sheet -no. 1606 |              |
| 7    | 1    | clogging indicator, visual-electrical |           | AE            |          | see sheet -no. 1615 |              |
| 8    | 1    | clogging sensor, electrical           |           | VS1           |          | see sheet -no. 1617 |              |
| 9    | 1    | clogging sensor, electrical           |           | VS2           |          | see sheet -no. 1618 |              |
| 10   | 1    | O-ring                                |           | 15 x 1,5      |          | 315357 (NBR)        | 315427 (FPM) |
| 11   | 1    | O-ring                                |           | 22 x 2        |          | 304708 (NBR)        | 304721 (FPM) |
| 12   | 1    | O-ring                                |           | 14 x 2        |          | 304342 (NBR)        | 304722 (FPM) |
| 13   | 1    | screw plug                            |           | 20913-4       |          | 309817              |              |
| 14   | 1    | screw plug                            |           | G ½           |          | 304678              |              |

item 13 execution only without clogging indicator or clogging sensor

### 4. Description:

The pressure filters of the series HPF 601-1351 are suitable for a working pressure up to 315 bar.

The pressure peaks are absorbed by a sufficient margin of safety. The HPF-filters are flange mounted to the hydraulic system.

The filter element consists of star-shaped, pleated filter material which is supported on the inside by a perforated core tube and is bonded to the end caps with a high-quality adhesive. The flow direction is from outside to the inside. Filter elements are available down to 4 µm<sub>(G)</sub>.

Internormen Product Line filter elements are known as elements with a high intrinsic stability and an excellent filtration capability, a high dirt-retaining capacity and a long service life.

Internormen Product Line filter are suitable for all petroleum based fluids, HW-emulsions, most synthetic hydraulic fluids and lubrication oils.

Internormen Product Line filter elements are available up to a pressure difference resistance of Δp 160 bar and a rupture strength of Δp 250 bar.

The internal valves are integrated into the centering pivot for the filter element.

After reaching the opening pressure the by-pass valve causes that an unfiltered partial flow passes the filter. With the reverse valve a protection of the filter element is given when having a reverse flow inside the filter. The reverse flow will not be filtered.


### 5. Technical data:

|                          |  |
|--------------------------|--|
| temperature range:       | -10°C to + 80°C (for a short time + 100°C)               |
| operating medium:        | mineral oil, other media on request                      |
| max. operating pressure: | 315 bar  |
| test pressure:           | 450 bar  |
| connection system:       | manifold mounted   |
| housing material:        | C-steel; EN-GJS-400-18-LT                                |
| sealing material:        | Nitrile (NBR) or Viton (FPM), other materials on request |
| installation position:   | vertical   |

Classified under the Pressure Equipment Directive 97/23/EC for mineral oil (fluid group 2), Article 3, Para. 3.

Classified under ATEX Directive 94/9/EC according to specific application (see questionnaire sheet-no. 34279-4).

### 6. Symbols:

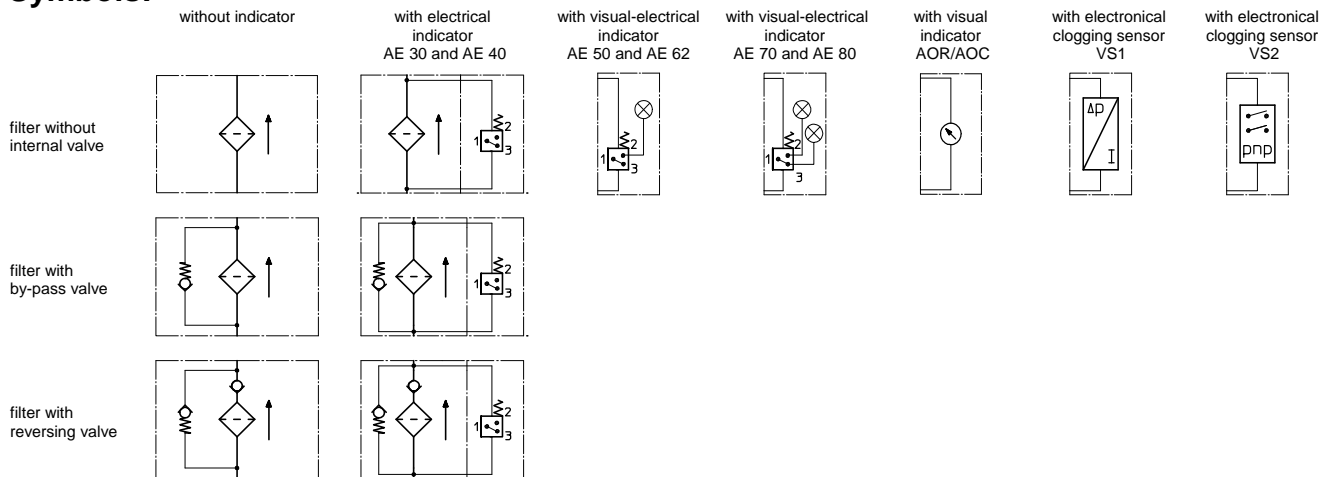

### 7. Pressure drop flow curves:

Precise flow rates see 'Interactive Product Specifier', respectively Δp-curves; depending on filter fineness and viscosity.

### 8. Test methods:

Filter elements are tested according to the following ISO standards:

|           |   |
|-----------|---|
| ISO 2941  | Verification of collapse/burst resistance               |
| ISO 2942  | Verification of fabrication integrity                   |
| ISO 2943  | Verification of material compatibility with fluids      |
| ISO 3723  | Method for end load test                                |
| ISO 3724  | Verification of flow fatigue characteristics            |
| ISO 3968  | Evaluation of pressure drop versus flow characteristics |
| ISO 16889 | Multi-pass method for evaluating filtration performance |