

RH8


8"RO RO Membrane Housing (High Pressure Type)





設計壓力 Design P.	40 kgf/cm ² 600 psi	最大操作壓力 Max Operating P.	40 kgf/cm ² 600 psi
設計溫度 Design T.	100°C	操作溫度 Operating T.	75°C
標準口徑 Standards	N1-1 內牙 · N2-1 1/2" 機械接頭		
Nozzle	N1-1PT-F. N2-1 1/2"V. Mechanical Joint		



RH8	4	4	1	PF	1	V	E	BA
產品型號 Model	管身尺寸 Length	管身材質 Shell Material	N1 尺寸 N1 Size	N1 規格 N1 Type	N2 尺寸 N2 Size	N2 規格 N2 Type	O 環材質 O-ring	外 / 內表面處理 Exterior / Interior Surface Finishing
	4-40" 8-80" 12-120" 16-160" 20-200"	4-304 6-316	1-1" 121-1-1/2" 2-2"	PF-PTF NF-NPTF V-Mechanical Joint C-CLAMP	1-1" 121-1-1/2" 2-2"	PF-PTF NF-NPTF V-Mechanical Joint C-CLAMP	E-EPDM N-NBR V-VITON	A- 酸洗 ACID-Washing B- 研磨 Burnishing P- 拋光 Polishing

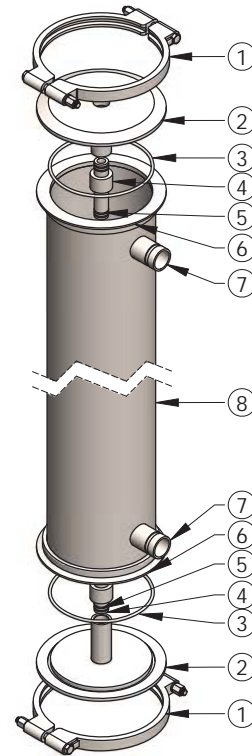

No.	Description
1	Clamp
2	RO Head
3	O-ring
4	PVC Coupling
5	O-ring
6	Shell flange
7	Mechanical Joint
8	Shell

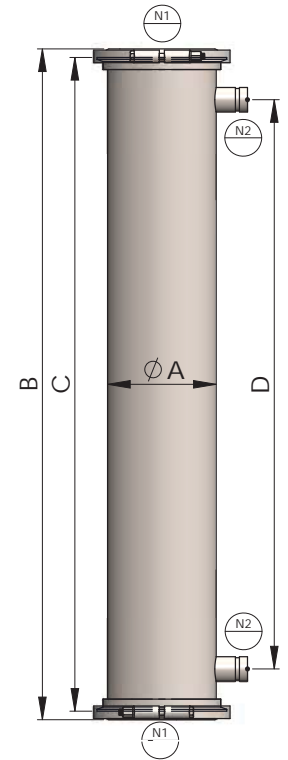

型式 Model	A m/m	B m/m	C m/m	D m/m	N1	N2	重量 Weight
RH8-4	Ø216	1137	1300	1132	1"	1-1/2"	64kg
RH8-8	Ø216	2353	2316	2148	1"	1-1/2"	100kg
RH8-12	Ø216	3369	3332	3164	1"	1-1/2"	136kg
RH8-16	Ø216	4385	4348	4180	1"	1-1/2"	172kg
RH8-20	Ø216	5401	5364	5196	1"	1-1/2"	208kg