


| REVISIONS | | | | |
|-----------|--------|--|----------|---------|
| REV. | ZONE | DESCRIPTION | DATE | INITIAL |
| 1 | 1B, 2B | CHANGED "WORKING" TO "DESIGN" & TEMPERATURE FROM 200°F TO 160°F IN TECHNICAL DATA TABLE. | 09/27/12 | S.P. |
| 2 | 7D | ADDED NOTE 1. | 10/17/14 | M.S. |

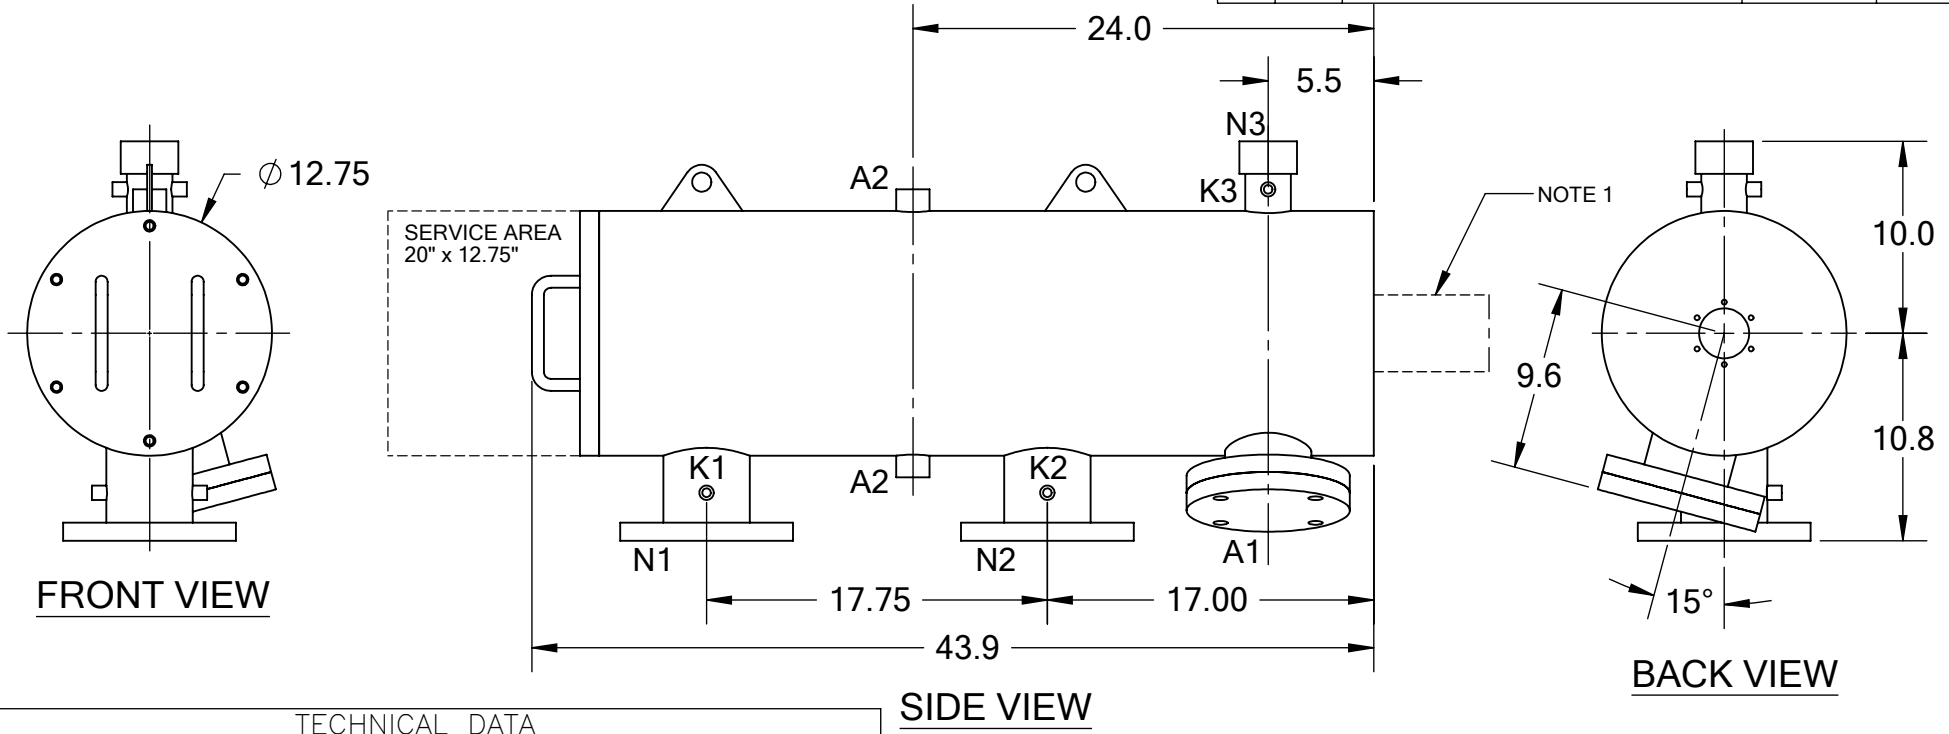

TECHNICAL DATA

| | |
|--------------------|--------------------------------------|
| FLOW RATE | MAX. 400 GPM (91 m ³ /hr) |
| SCREEN SIZE | ___ MICRON |
| SCREEN AREA | 2.5 SQ. FEET |
| DESIGN TEMPERATURE | 160 °F |
| DESIGN PRESSURE | 150 PSI |
| EMPTY WEIGHT | ~250 LBS. |
| FULL WEIGHT | ~450 LBS. |

SIDE VIEW

NOTES:
 1. PLEASE ALLOW ~20" ADDITIONAL TO INSTALL AND REMOVE THE PISTON ASSEMBLY TO THE BACKSIDE OF THE FILTER.

| NOZZLE | CONNECTION | TYPE | SIZE | RATING | TOLERANCES (UNLESS OTHERWISE SPECIFIED) | | | |
|--------|---------------------|----------|-------------|------------------------|---|-------------------------------|--|--------------|
| A1 | SERVICE PORT | FLANGED | 3.5" ASA | CL. #150 F.F. w/ Blind | FRAC. ±1/16 | ANGLE ±1° | | |
| A2 | PRESSURE RELEASE | THREADED | 1" NPT(2) | | .X ±.1 | | | |
| K1 | HIGH PRESSURE CONN. | THREADED | 1/4" NPT(2) | .XX ±.05 | | | | |
| K2 | LOW PRESSURE CONN. | THREADED | 1/4" NPT(2) | .XXX ±.010 | | | | |
| K3 | HYDRAULIC CONN. | THREADED | 1/4" NPT(2) | CLASS #150 F.F.S.O. | MATERIAL: SST | | | |
| N1 | INLET | FLANGED | 4" ASA | | CLASS #150 F.F.S.O. | DRAWN BY: S. PERKINSON | | |
| N2 | OUTLET | FLANGED | 4" ASA | | | DATE: 06/23/11 | TITLE: ABW4-LPE FILTER, CUT DRAWING | |
| N3 | FLUSH OUTLET | THREADED | 2" NPT | | SCALE: 1:10 | SHEET: 1 OF 1 | DRAWING NUMBER ABW-4LPE-CUT-01 | REV 2 |

For more information:

WEB: FLTR.com.au **PHONE:** (+61) 1300 62 4020 **EMAIL:** info@FLTR.com.au **SKYPE:** Purple.Engineering

