


| REVISIONS | | | | |
|-----------|--------|--|----------|---------|
| REV. | ZONE | DESCRIPTION | DATE | INITIAL |
| 1 | 1B, 2B | CHANGED "WORKING" TO "DESIGN" & TEMPERATURE FROM 200°F TO 160°F IN TECHNICAL DATA TABLE. | 09/27/12 | S.P. |
| 2 | 7D | ADDED NOTE 1. | 10/17/14 | M.S. |

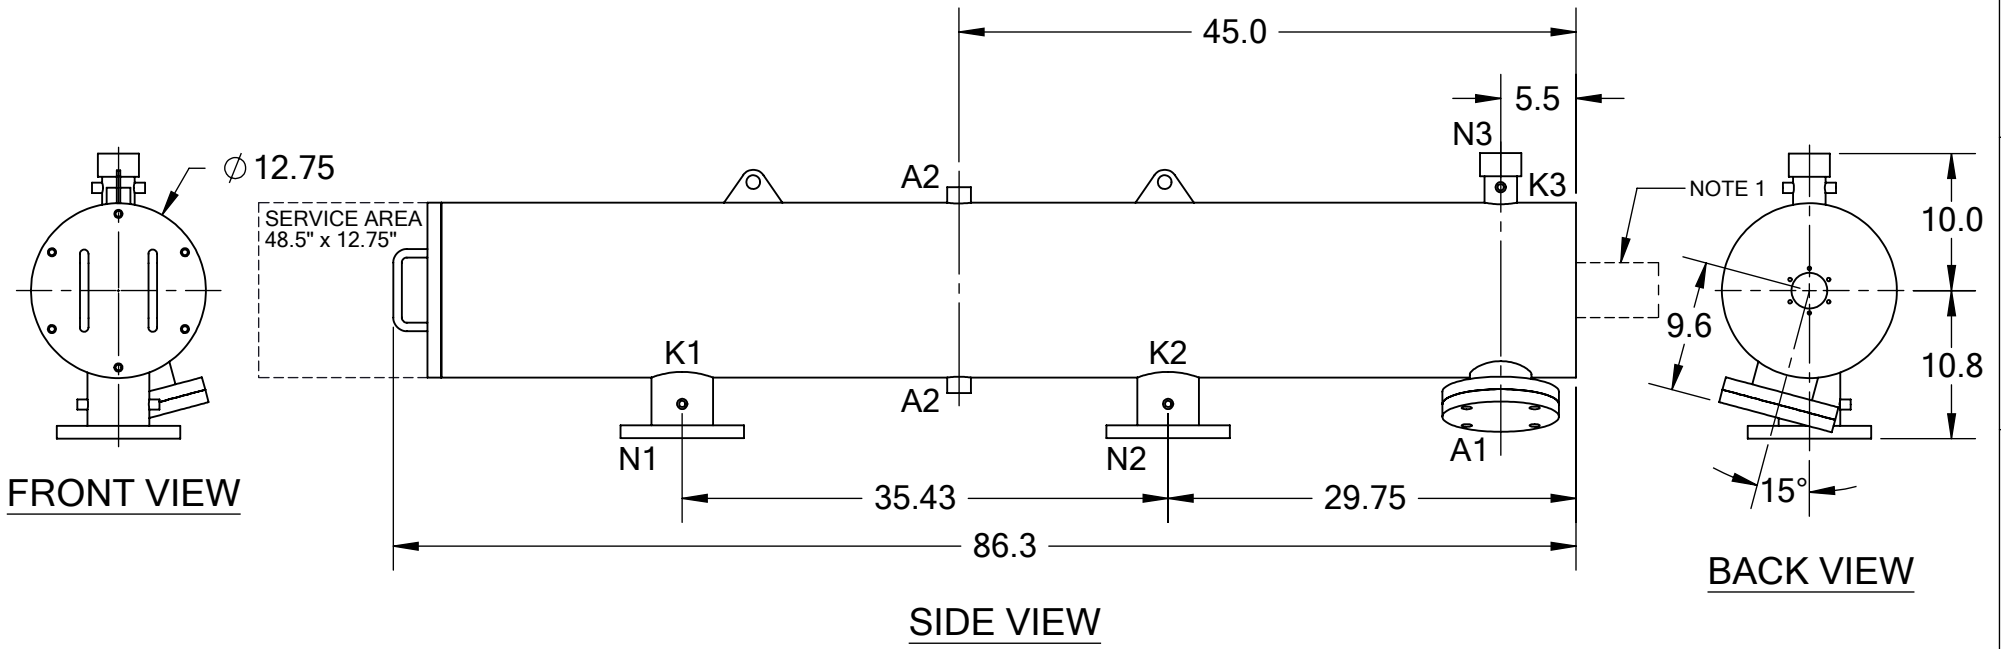

TECHNICAL DATA

| | |
|--------------------|---------------------------------------|
| FLOW RATE | MAX. 800 GPM (182 m ³ /hr) |
| SCREEN SIZE | ___ MICRON |
| SCREEN AREA | 8.0 SQ. FEET |
| DESIGN TEMPERATURE | 160 F |
| DESIGN PRESSURE | 150 PSI |
| EMPTY WEIGHT | ~325 LBS. |
| FULL WEIGHT | ~625 LBS. |

NOTES:

- PLEASE ALLOW ~20" ADDITIONAL TO INSTALL AND REMOVE THE PISTON ASSEMBLY TO THE BACKSIDE OF THE FILTER.

| NOZZLE | CONNECTION | TYPE | SIZE | RATING | TOLERANCES (UNLESS OTHERWISE SPECIFIED) | TITLE |
|--------|---------------------|----------|-------------|------------------------|---|---|
| A1 | SERVICE PORT | FLANGED | 3.5" ASA | CL. #150 F.F. w/ Blind | FRAC. ±1/16 ANGLE ±1° .X ±.1 .XX ±.05 .XXX ±.010 | ABW4-XLP FILTER, CUT DRAWING |
| A2 | PRESSURE RELEASE | THREADED | 1" NPT(2) | | | |
| K1 | HIGH PRESSURE CONN. | THREADED | 1/4" NPT(2) | | | DRAWING NUMBER REV ABW-4XLP-CUT-01 2 |
| K2 | LOW PRESSURE CONN. | THREADED | 1/4" NPT(2) | | | |
| K3 | HYDRAULIC CONN. | THREADED | 1/4" NPT(2) | | | |
| N1 | INLET | FLANGED | 4" ASA | CLASS #150 F.F.S.O. | | |
| N2 | OUTLET | FLANGED | 4" ASA | CLASS #150 F.F.S.O. | | |
| N3 | FLUSH OUTLET | THREADED | 2" NPT | | | |
| | | | | | MATERIAL: SST DRAWN BY: S. PERKINSON DATE: 06/24/11 SCALE: 1:14 SHEET: 1 OF 1 | |

For more information:

WEB: FLTR.com.au PHONE: (+61) 1300 62 4020 EMAIL: info@FLTR.com.au SKYPE: Purple.Engineering

