



REVISIONS				
REV.	ZONE	DESCRIPTION	DATE	INITIAL

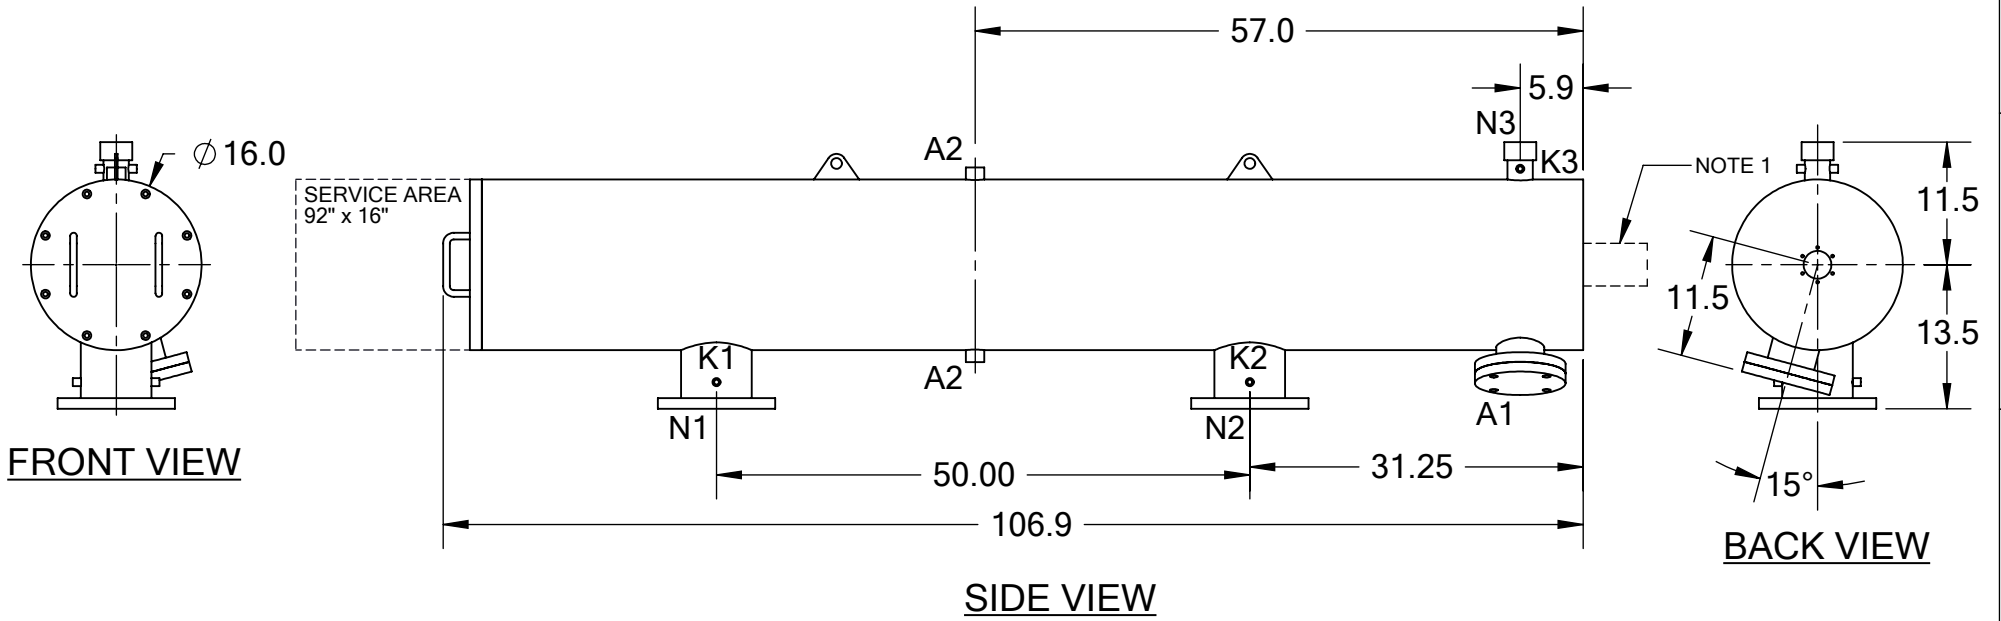

TECHNICAL DATA

FLOW RATE	MAX. 2,400 GPM (545 m ³ /hr)
SCREEN SIZE	___ MICRON
SCREEN AREA	11.0 SQ. FEET
DESIGN TEMPERATURE	160 F
DESIGN PRESSURE	150 PSI
EMPTY WEIGHT	~600 LBS.
FULL WEIGHT	~1,300 LBS.

- NOTES:**
- PLEASE ALLOW ~20" ADDITIONAL TO INSTALL AND REMOVE THE PISTON ASSEMBLY TO THE BACKSIDE OF THE FILTER.

NOZZLE	CONNECTION	TYPE	SIZE	RATING	TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
A1	SERVICE PORT	FLANGED	3.5" ASA	CL. #150 F.F. w/ Blind	FRAC. ±1/16	
A2	PRESSURE RELEASE	THREADED	1" NPT(2)		ANGLE ±1°	
K1	HIGH PRESSURE CONN.	THREADED	1/4" NPT(2)		.X ±.1	
K2	LOW PRESSURE CONN.	THREADED	1/4" NPT(2)	.XX ±.05		
K3	HYDRAULIC CONN.	THREADED	1/4" NPT(2)	.XXX ±.010		
N1	INLET	FLANGED	6" ASA	CLASS #150 F.F.S.O.		TITLE: ABW6-SLP FILTER, CUT DRAWING
N2	OUTLET	FLANGED	6" ASA	CLASS #150 F.F.S.O.		
N3	FLUSH OUTLET	THREADED	2" NPT			DRAWING NUMBER ABW-6SLP-CUT-03
					MATERIAL: SST	REV N/A
					DRAWN BY: M. SERRANO	
					DATE: 10/09/18	
					SCALE: 1:18	SHEET: 1 OF 1