


REVISIONS				
REV.	ZONE	DESCRIPTION	DATE	INITIAL
1	1B, 2B	CHANGED "WORKING" TO "DESIGN" & TEMPERATURE FROM 200°F TO 160°F IN TECHNICAL DATA TABLE.	09/27/12	S.P.
2	7D	ADDED NOTE 1.	10/17/14	M.S.

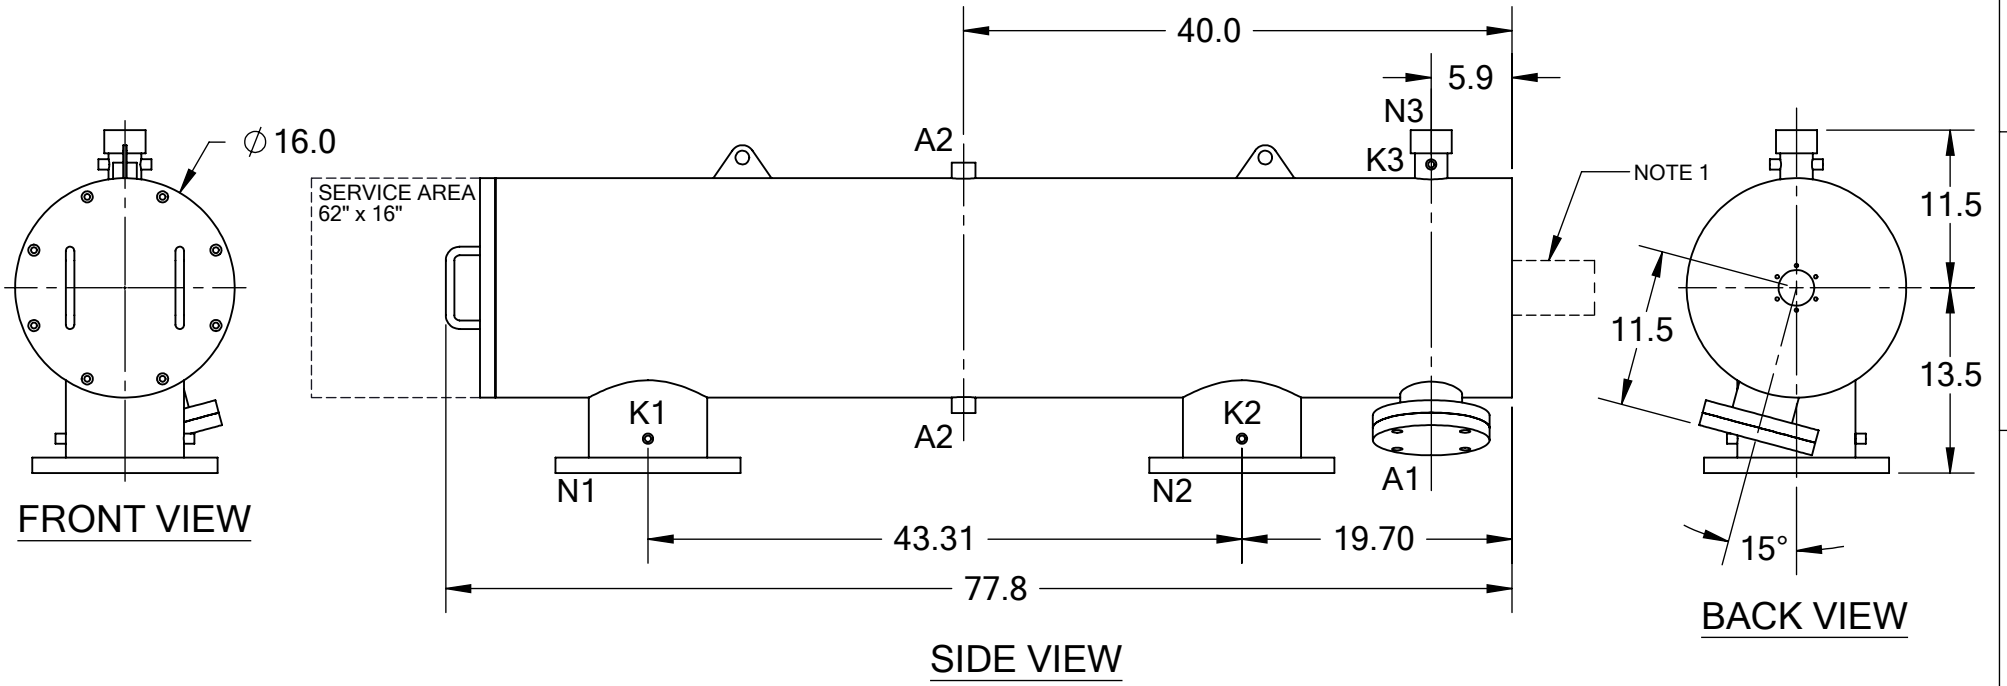

TECHNICAL DATA	
FLOW RATE	MAX. 1,750 GPM (397 m ³ /hr)
SCREEN SIZE	___ MICRON
SCREEN AREA	7.0 SQ. FEET
DESIGN TEMPERATURE	160 °F
DESIGN PRESSURE	150 PSI
EMPTY WEIGHT	~560 LBS.
FULL WEIGHT	~1,085 LBS.

NOTES:
 1. PLEASE ALLOW ~20" ADDITIONAL TO INSTALL AND REMOVE THE PISTON ASSEMBLY TO THE BACKSIDE OF THE FILTER.

NOZZLE	CONNECTION	TYPE	SIZE	RATING	TOLERANCES (UNLESS OTHERWISE SPECIFIED)		
A1	SERVICE PORT	FLANGED	3.5" ASA	CL. #150 F.F. w/ Blind	FRAC. ±1/16	ANGLE ±1°	
A2	PRESSURE RELEASE	THREADED	1" NPT(2)		.X ±.1		
K1	HIGH PRESSURE CONN.	THREADED	1/4" NPT(2)		.XX ±.05		MATERIAL: SST
K2	LOW PRESSURE CONN.	THREADED	1/4" NPT(2)		.XXX ±.010		
K3	HYDRAULIC CONN.	THREADED	1/4" NPT(2)				TITLE: ABW8-SP FILTER, CUT DRAWING
N1	INLET	FLANGED	8" ASA	CLASS #150 F.F.S.O.			
N2	OUTLET	FLANGED	8" ASA	CLASS #150 F.F.S.O.			DRAWN BY: S. PERKINSON
N3	FLUSH OUTLET	THREADED	2" NPT				
					DATE: 06/28/11	DRAWING NUMBER	
					SCALE: 1:14	SHEET: 1 OF 1	REV ABW-8SP-CUT-01 2