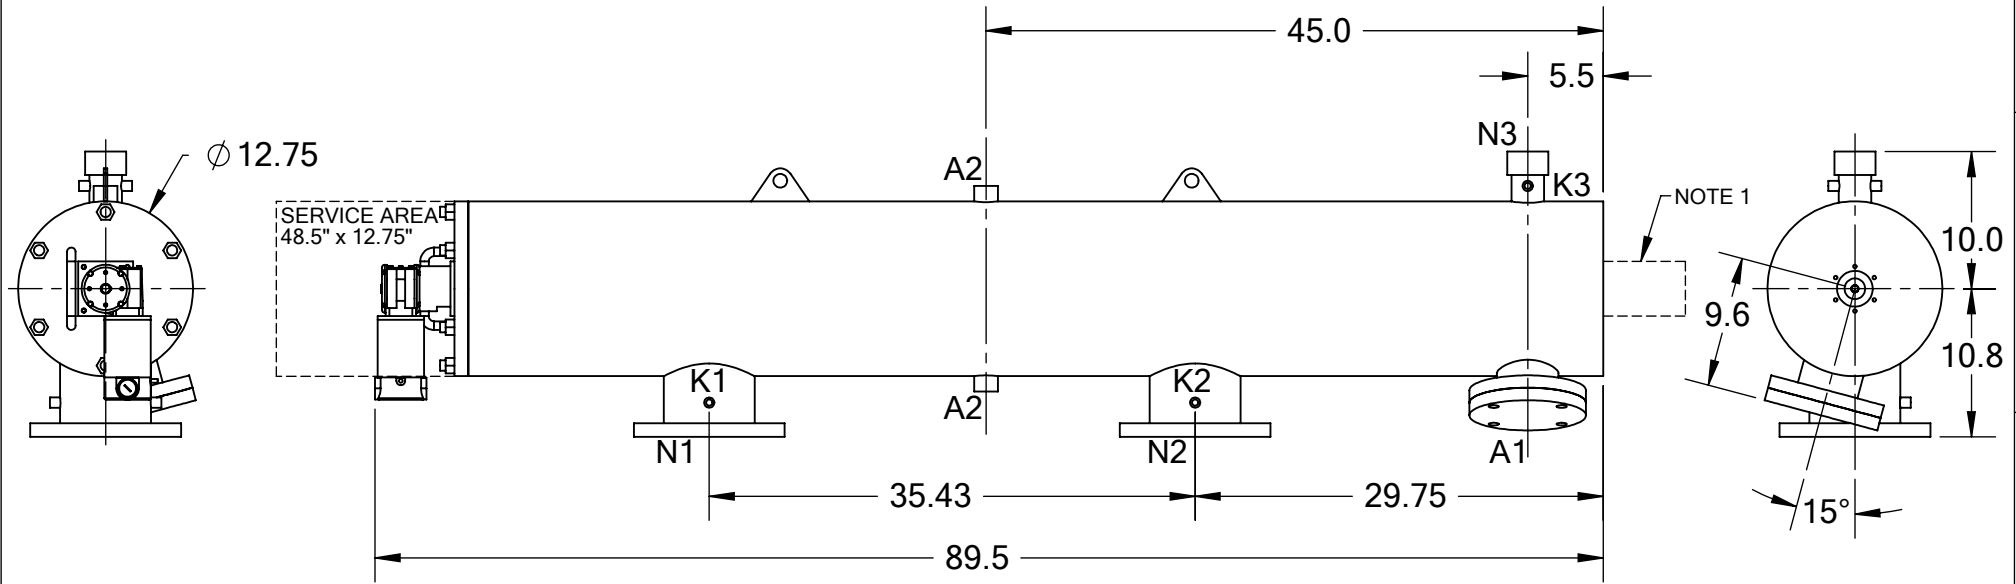


REVISIONS				
REV.	ZONE	DESCRIPTION	DATE	INITIAL
1	7D	ADDED NOTE 1.	04/16/15	M.S.





TECHNICAL DATA

FLOW RATE	MAX. 800 GPM (182 m <sup>3</sup> /hr)
SCREEN SIZE	___ MICRON
SCREEN AREA	8.0 SQ. FEET
DESIGN TEMPERATURE	160 °F
DESIGN PRESSURE	150 PSI
EMPTY WEIGHT	~335 LBS.
FULL WEIGHT	~635 LBS.

NOTES:

- PLEASE ALLOW ~20" ADDITIONAL TO INSTALL AND REMOVE THE PISTON ASSEMBLY TO THE BACKSIDE OF THE FILTER.

NOZZLE	CONNECTION	TYPE	SIZE	RATING	TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
A1	SERVICE PORT	FLANGED	3.5" ASA	CL. #150 F.F. w/ Blind		
A2	PRESSURE RELEASE	THREADED	1" NPT(2)		ANGLE ±1°	
K1	HIGH PRESSURE CONN.	THREADED	1/4" NPT(2)			
K2	LOW PRESSURE CONN.	THREADED	1/4" NPT(2)			<b>TITLE:</b> LPF6-XLP FILTER, CUT DRAWING
K3	HYDRAULIC CONN.	THREADED	1/4" NPT(2)			
N1	INLET	FLANGED	6" ASA	CLASS #150 F.F.S.O.	<b>MATERIAL:</b> SST	<b>DRAWING NUMBER</b> <b>REV</b> LPF-6XLP-CUT-01    1
N2	OUTLET	FLANGED	6" ASA	CLASS #150 F.F.S.O.	<b>DRAWN BY:</b> S. PERKINSON	
N3	FLUSH OUTLET	THREADED	2" NPT		<b>DATE:</b> 04/12/12	
					<b>SCALE:</b> 1:14	<b>SHEET:</b> 1 OF 1