


**FRONT VIEW**

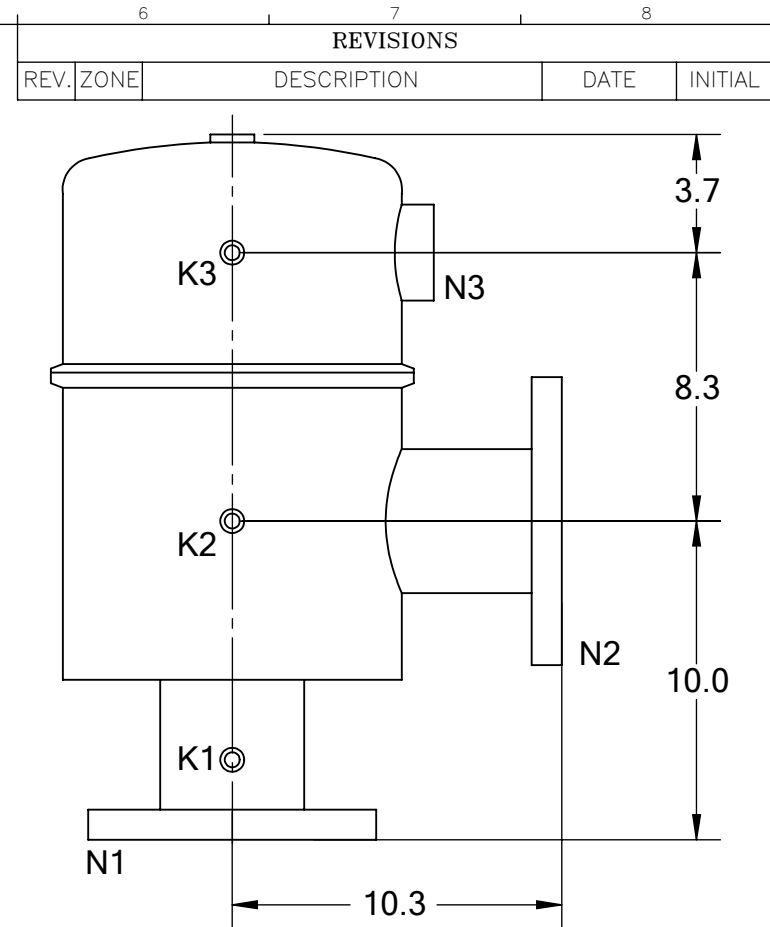

**SIDE VIEW**

**TECHNICAL DATA**

FLOW RATE	MAX. 350 GPM (80 m <sup>3</sup> /hr)
SCREEN SIZE	___ MICRON
SCREEN AREA	1.5 SQ. FEET
MAXIMUM TEMPERATURE	MAX. 200 °F
MAXIMUM PRESSURE	MAX. 150 PSI
EMPTY WEIGHT	~100 LBS.
FULL WEIGHT	~175 LBS.

NOZZLE	CONNECTION	TYPE	SIZE	RATING	TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
K1	HIGH PRESSURE CONN.	THREADED	1/4" NPT(2)	CLASS #150 F.F.S.O.	FRAC. ±1/16      ANGLE ±1° .X ±.1 .XX ±.05 .XXX ±.010	
K2	LOW PRESSURE CONN.	THREADED	1/4" NPT			
K3	HYDRAULIC CONN.	THREADED	1/4" NPT	CLASS #150 F.F.S.O.		
N1	INLET	FLANGED	4" ASA			
N2	OUTLET	FLANGED	4" ASA			
N3	FLUSH OUTLET	THREADED	2" NPT			
<b>MATERIAL:</b> SST <b>TITLE:</b> MTF4 FILTER, CUT DRAWING						
<b>DRAWN BY:</b> S. PERKINSON <b>DRAWING NUMBER</b>						
<b>DATE:</b> 11/11/11 <b>REVISION</b>						
<b>SCALE:</b> 1:6 <b>SHEET:</b> 1 OF 1      MTF-4-CUT-01      N/A						