



FRONT VIEW

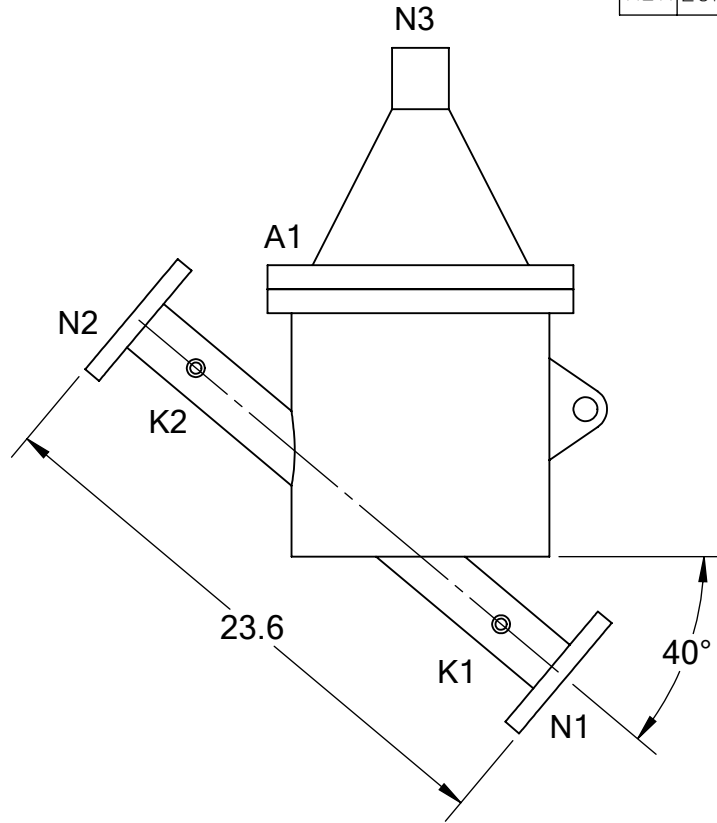

SIDE VIEW

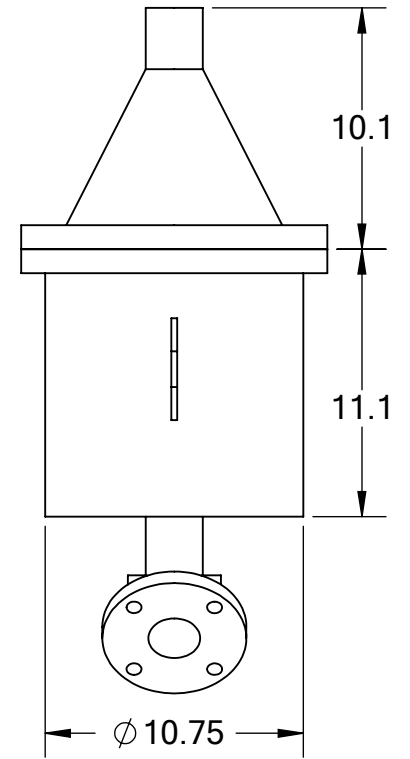

BACK VIEW

REVISIONS				
REV.	ZONE	DESCRIPTION	DATE	INITIAL

TECHNICAL DATA

FLOW RATE	MAX. 200 GPM (45 m ³ /hr)
SCREEN SIZE	___ MICRON
SCREEN AREA	2.0 SQ. FEET
DESIGN TEMPERATURE	160 °F
DESIGN PRESSURE	150 PSI
EMPTY WEIGHT	~100 LBS.
FULL WEIGHT	~150 LBS.

NOZZLE	CONNECTION	TYPE	SIZE	RATING
A1	SERVICE PORT	FLANGED	12.75" ASA	CLASS #150 F.F.S.O.
K1	HIGH PRESSURE CONN.	THREADED	1/4" NPT(2)	
K2	LOW PRESSURE CONN.	THREADED	1/4" NPT(2)	
N1	INLET	FLANGED/ THREADED	2" ASA/ 2" NPT	CLASS #150 F.F.S.O.
N2	OUTLET	FLANGED/ THREADED	2" ASA/ 2" NPT	
N3	FLUSH OUTLET	THREADED	2" NPT	

TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
FRAC. ±1/16	ANGLE ±1°
.X ±.1	
.XX ±.05	
.XXX ±.010	
MATERIAL: SST	
DRAWN BY: J. KAWAMOTO	
DATE: 01/09/2014	
SCALE: 1:8	SHEET: 1 OF 1



TITLE: CSF2 FILTER, CUT DRAWING	
DRAWING NUMBER CSF-2-CUT-01	REV N/A