




GB6 ELECTRIC CONTROLLER

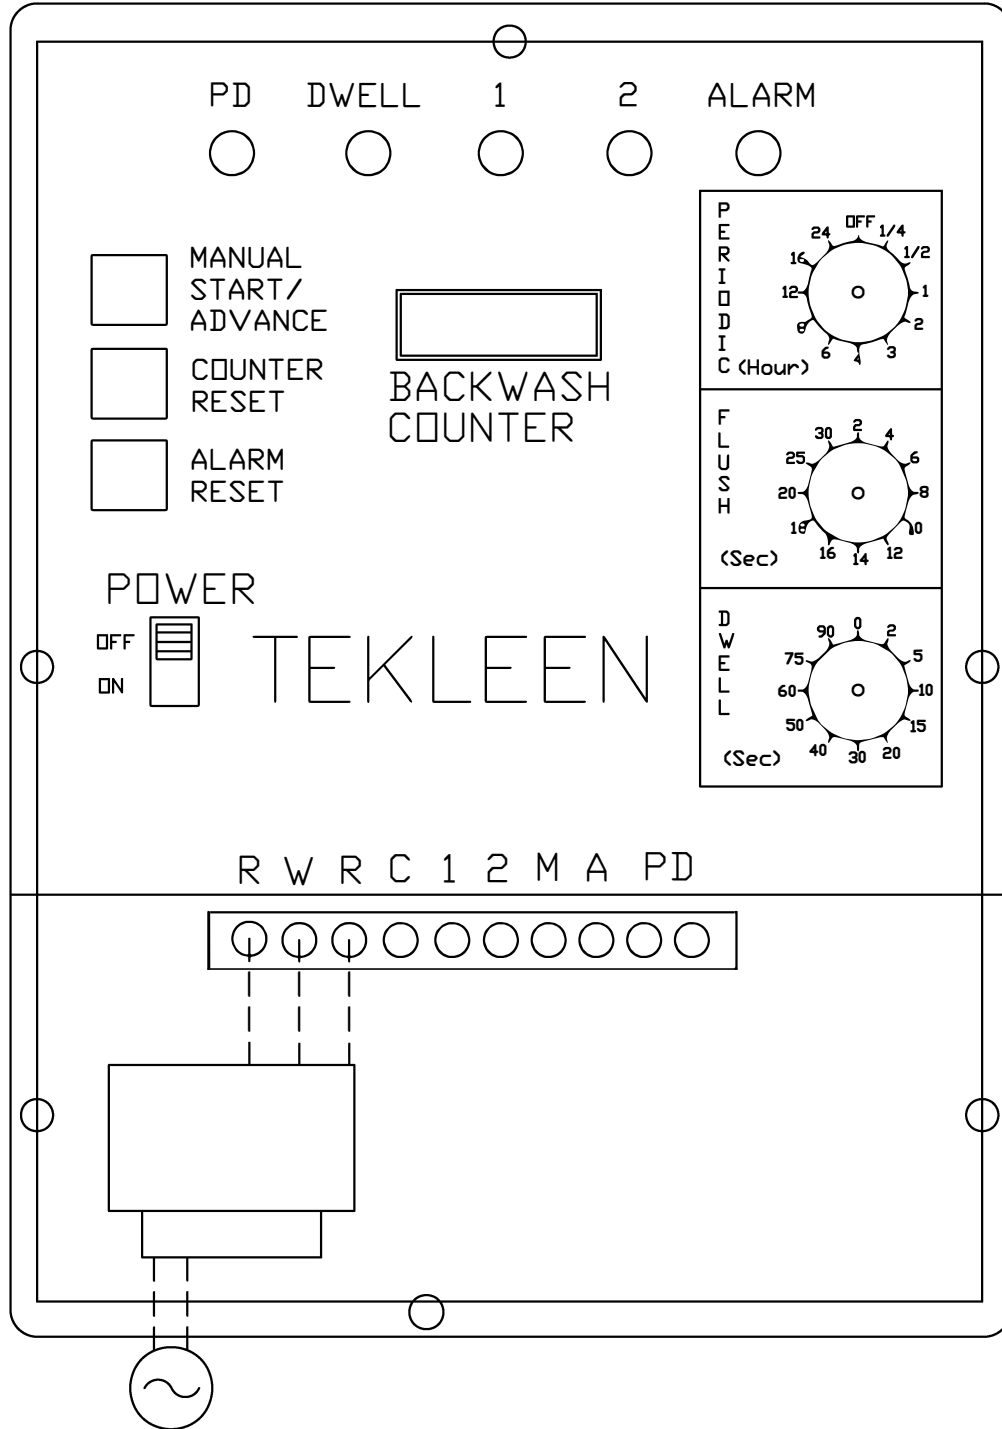

Available Features

- LCD Monitor Panel
- Backwash Counter
- Periodic Flush Timer
- Manual Backwash
- Weather-proof, UV Resistant
- Protective Case
- NEMA 3 Enclosure

Specifications

- Input: 110/220 VAC, 50/60 Hz. or 9/12 VDC
- Output: 2.5 amps at 24 VAC or 12 VDC
- Efficiency: Less than 20 milliamps (idle)
- Dimensions: 10"L X 7.5"W X 4"H
- Weight: 4 lbs.

Terminal Connections

- C: Common
- 1: Filter 1 Control
- 2: Filter 2 Control
- M: Main Line (PSV)
- A: Alarm
- P/D: Differential Pressure

| | | | |
|--|------------|----------------|-----|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES | | TITLE | |
| DECIMALS | ANGULAR | GB6 Controller | |
| .XX ± .05 | ± 0.5 DEG. | SIZE | REV |
| .XXX ± .01 | | A | 0 |
| DRAWN | DATE | DWG NO. | |
| Daniel Stenberg | 2-28-06 | GB6 | |
| CHECKED | | SHEET OF | |
| DESIGN FOR: | | NOT TO SCALE | |