

Discharge Oil Mist Filters (External Drain)

EE Series

Benefits

- Compact, low profile design
- Easy field maintenance

Features

- Captures oil fog, mist or aerosol from discharge of oil sealed vacuum pumps
- Seamless drawn housings
- Corrosive resistant white powder coat carbon steel
- EE-PSG925 assemblies come standard in zinc nickel finish
- 1/8" external drain




Technical Specifications

- 0.3 micron media; 99.97% efficiency
- Continuous operating temp: 20°C (68°F) to 80°C (180°F)
- Back pressure valve designed to release element at 0,5 bar (7.35 PSI) differential for pump safety

Options

- Additional ISO flange connections
- Non-standard finishes available

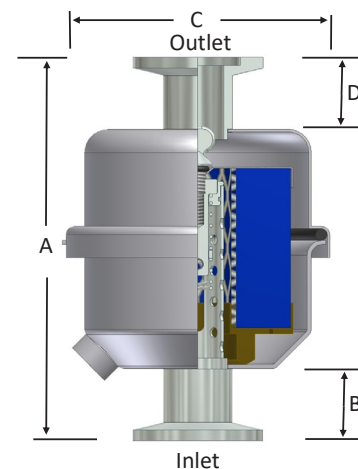

Inlet Type	Outlet Type	Assembly m ³ /hr Rating	Assembly Part Number	Dimensions - mm				Suggested Service ht. mm	Replacement Element Part No.	Element m ³ /hr Rating
				A	B	C	D			
3/4" NPT	1/2" NPSC	14	EE-GL915-075	116	28	81	14	60	GL915	14
16 mm ISO Flange	16 mm ISO Flange	14	EE-GL915-QF16	119	22	81	22	60	GL915	14
25 mm ISO Flange	25 mm ISO Flange	14	EE-GL915-QF2516	119	22	81	22	60	GL915	14
25 mm ISO Flange	25 mm ISO Flange	34	EE-PSG925-NW25	186	22	135	22	124	PSG925	34

Note: QF2516 designation: unit has an ISO NW25 flange with a 16 mm tube (neck).

See Oil Mist Discharge Filter Technical Data for sizing guidelines.

Rev: M202402C2

For more information:

WEB: FLTR.com.au PHONE: (+61) 1300 62 4020 EMAIL: info@FLTR.com.au SKYPE: Purple.Engineering