

# Discharge Silencer with Filter

**EFS Series  $\frac{3}{8}$ " - 1", NW16 - NW25**

## Features

- Captures tip seal dust
- Compact design combines both filtration efficiency and noise reduction
- Integrated inlet diffuser optimizes sound attenuation
- Multi-stage noise reducing features, including final stage sound absorbent insert
- Tubular silencing design - tube is positioned to maximize attenuation and air flow while minimizing pressure drop
- Patented high grade element with built-in Butterfly gasket seal which creates a positive seal between housing hemispheres, and a new seal with each element
- Seamless drawn housings
- Corrosive resistant black powder coat carbon steel
- Ability to mount vertically, or horizontally




## Technical Specifications

- Temp (continuous): min -26°C (-15°F) max 104°C (220°F)
- Polyester: 99%+ removal efficiency standard to 10 micron

## Options

- Various media for different environments
- Straight through configuration
- Various nonstandard finishes and connection styles

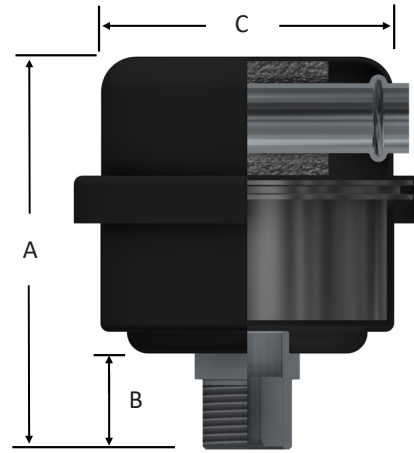

Inlet/Outlet		Assembly m <sup>3</sup> /hr Rating	Assembly Part Number	Dimensions - mm			Suggested Service ht. mm	Approx. Weight (kg)	Replacement Element Part No.
Size	Type			A	B	C			
$\frac{3}{8}$ "	MPT	4	EFS-05-038/1	71	17	64	25	0.23	05™
$\frac{1}{2}$ "	MPT	16	EFS-07-050/1	96	22	81	51	0.34	07™
NW16	ISO Flange	16	EFS-07-NW16/1	96	22	81	51	0.34	07™
NW25	ISO Flange	19	EFS-07-NW25/1	96	22	81	51	0.34	07™
1"	MPT	41	EFS-11-100/2	115	22	105	51	0.57	11™
NW25	ISO Flange	40	EFS-11-NW25/2	105	22	105	51	0.57	11™

See Oil Mist Discharge Filter Technical Data for sizing guidelines.

Rev: M202402C2

For more information:

WEB: FLTR.com.au PHONE: (+61) 1300 62 4020 EMAIL: info@FLTR.com.au SKYPE: Purple.Engineering